

light on your work

X-START

4x320W LED - 9M **Kubota**



TRIME

Lighting Tower Specialist



X-START

4x320W LED - 9M 

Our engineers know that the market needs a lighting tower that is rugged, long lasting and safe. The X-START LED has been created beginning from these characteristics. It is the best solution to your needs and guarantees 5000 sqm of illuminated area. 18 units can be loaded on a standard truck. To all of this, we added the technology that allows for maximum fuel efficiency and reliability.



8,5m



706 Kg



340°



5000 sqm



80(l) - 0,55(l/h)

- Multi-directionally adjustable and tiltable floodlights
- 7 sections vertical tower 8,5 m, 340° rotatable
- Galvanized metalworks
- 80 µm powder coating
- Very compact dimensions for easy handling & transportability, up to 18 units per truck
- Central lifting eye, forklift pockets for effective handling
- Plug & play, colour coded cables and connectors
- Guided main coiled cable to avoid damage during tower operation
- Control panel alarms for engine protection and fuel level indicator
- Circuit breaker for electrical protection against overload
- External emergency stop button
- Certified wind stability up to 80 km/h
- 5 height adjustable stabilizers
- On board levels for guidance during stabilization

APPLICATIONS



Special events



Rural & hard to reach areas



Emergency response




Construction & work sites




Gas, oil & mining operations



Military applications



Illuminated area
5000 sqm



18
Units Per Truck



You can place 18 units on a single vehicle thanks to one of the compactest footprints on the market.

KEY BENEFITS

✓ *Easy to move*

✓ *Robustness*

✓ *Safety*

✓ *Cost effective*



LED TECHNOLOGY

SAFETY VERTICAL MAST

GALVANIZED BODY
DURABLE ANTI-CORROSION
PROTECTION

4 ADJUSTABLE STABILIZERS

FORK LIFT POCKET

town construction site
building maintenance
project repairing
structure forbidden
lower caution tower
progress structure town
industrial reporting site
downtown building
danger site
prohibited

technical data

Dimensions & weight	
Dimensions min. (mm)	1830x1370x2560
Dimensions max. (mm)	2320x2570x8500
Total weight without fuel	706 Kg


Features	
Rotation	340°
Floodlights	4x320W
Lamps	LED
Options	Homologated road trailer

Alternator	
Model	Synchronous
Frequency (Hz)	50
Insulation class	H
Degree of protection	IP23
Single phase voltage	3,5 kVA - 230V
Auxiliary outlets	1 kVA

Engine	
Model	Kubota Z482
Fuel	Diesel
r.p.m	1500
Tank capacity (l)	80
Consumption (l/h)	0,55
Running time (h)	145
Noise level (dBA) at 7m	65

Standard load delivery



18 sets



Units Per Truck

Illuminated area

5000 sqm

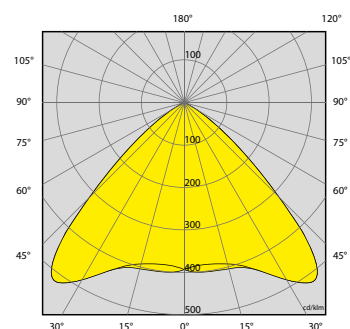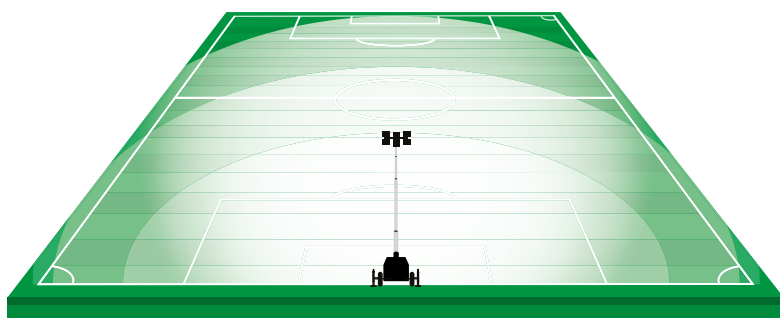

Lighting Tower **Specialist**

TRIME s.r.l.

Strada per Robecco, snc
20081 Cassinetta di Lugagnano (MI) - Italy
Tel. +39 02 942 1724
Sales Dept. +39 0382 406 252
www.trime.it - info@trime.it

The TRIME policy is one of continuous improvement. The company reserves the right to modify the technical specifications and items described in this catalogue at any time and without notice for technical or commercial reasons. Product images are shown for information only