

## ONE powersource gives multiple choice...



## - in high quality tools for professionals!



HYCON hydraulic tools and powerpacks are the choice of professionals.

For the expert, who values high performance and reliability, operator comfort and easy service. Furthermore, HYCON is ONE hydraulic system with only ONE power source: THE HYCON POWERPACK



If you have never tried hydraulic breakers, tools or powerpacks, the explanation is often quite simple: You know what you have, and you probably feel a little insecure by changing to hydraulics. The force of habit is quite understandable - and we know it so well at HYCON..!

Therefore we have gathered a number of well documented facts in this catalogue, which will most likely make you see things differently and arouse your interest in many benefits of good equipment from HYCON.

The HYCON HH-series is a complete line of handheld, hydraulic breakers. The breakers are characterized by superior performance compared to conventional electric and pneumatic tools, and the HH-series is among the best performing on the market. With a HYCON breaker the job is done faster, more efficiently, and you save time and money from day one.

Our tools, such as ringsaws, cut-off saws and core drills, are characterized by ultimate quality and durability. Make no mistake about the weight: HYCON Tools gives you a very low operating weight with maximum power..!


The HYCON HH-series, the HYCON Tools and the HYCON HPP-powerpacks are designed and made in Denmark. They are made for tough breaking jobs under extreme working conditions. We make no compromises in technique and design, and we use only the best and strongest components to ensure unique functioning and long lifetime of our tools.

HYCON is handmade quality, and works irrespective of weather conditions, does not freeze up in the winter and can also be used under water!



# "The Fuel-Saver" versus traditional compressor...



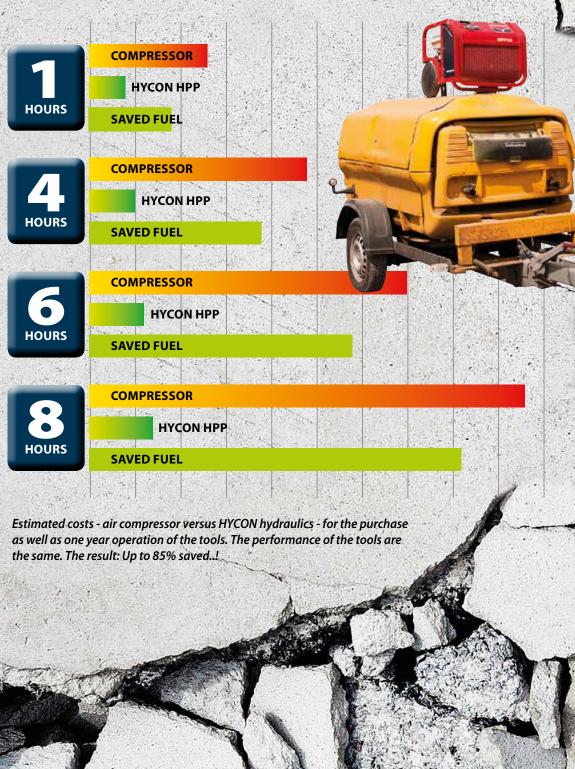

















## Higher efficiency, robust design and low weight..!

The hydraulic HYCON HPP-powerpacks are the power source of the HYCON hydraulic system. The series of powerpacks complies with any demand on an efficient power source - irrespective of the size, the nature and the difficulty of the jobs. The HPP-powerpacks are characterized by a simple and sturdy modular construction with few wearing parts and an easily-accessible and user-friendly design. The individual components of the powerpacks have been carefully selected after thorough tests on our testing facilities, and the entire HPP-series has a unique quality and therefore a high reliability.

No instructions are required for the very simple operation of the powerpacks - this is one of the features that make this solution very suitable for the rental business. The HYCON hydraulic system ensures flexibility, more power - and fuel consumption much lower than a compressor..!


























### HYCON breakers: Raw power at low weight...


The HYCON HH-series is the result of the strongest and most modern design on the market. Our hydraulic quality breakers have practically only two moving parts, and this ensures minimum wear and consequently much lower operating costs. The HYCON HH-series is equipped with the world's best vibration-dampening system as standard - the HYCON PROLINE handle.


This handle gives unique operator comfort with a vibration level as low as 4.8 m/s<sup>2</sup> (HH20RV), and the breaker can therefore be used efficiently 8 hours per day.

The reliability, the sturdy design and the supreme component quality of the HYCON HH-series means long life - also under extreme working conditions!

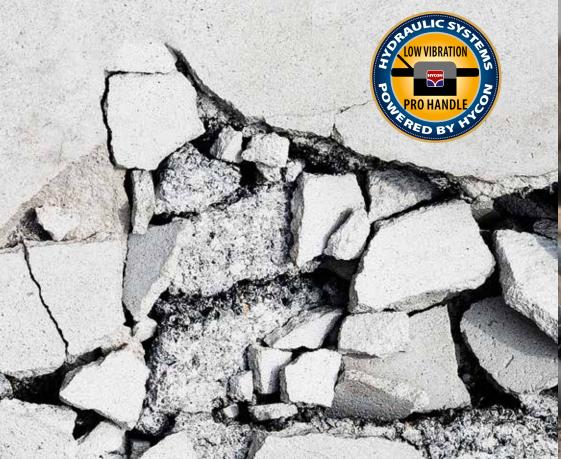





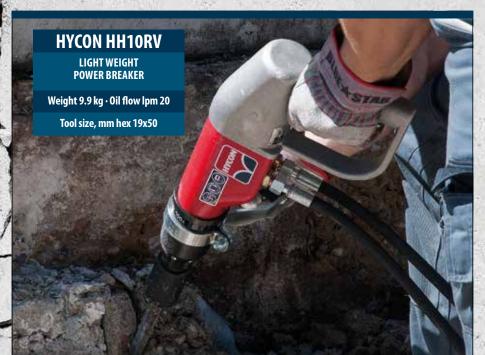


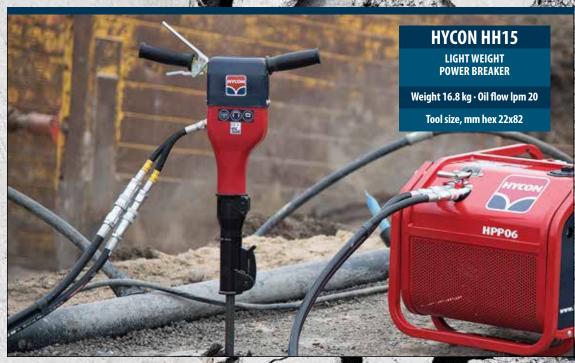




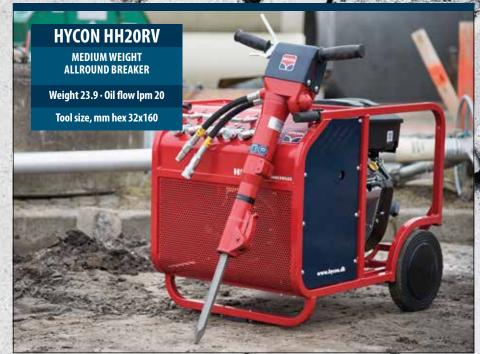

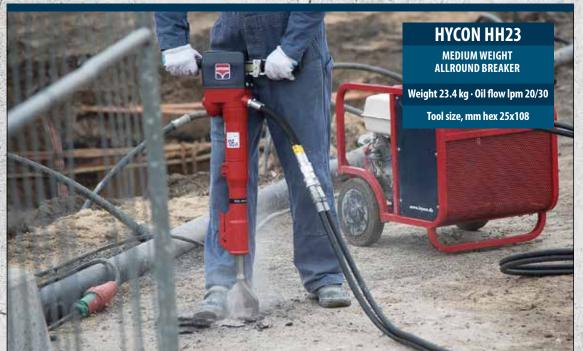

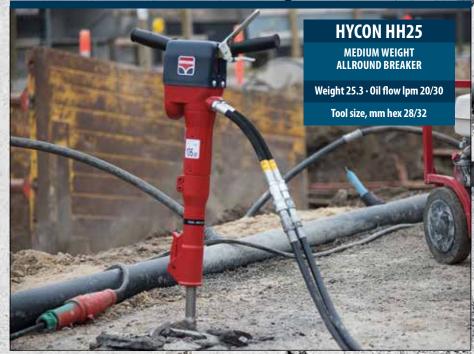

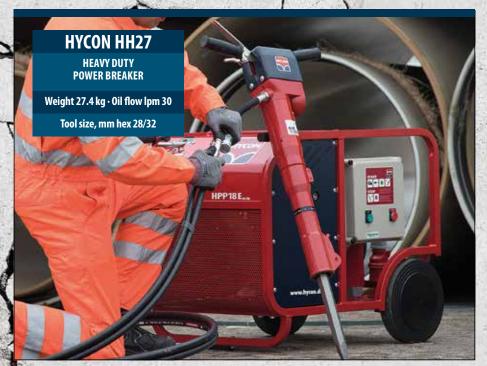





With a cutting depth of 300 mm this unique tool gives you the best cutting-economy, higher efficiency - and a lot more power..!

The HYCON hydraulic ring saw offers you the most overall efficient and productive 300 mm deep cutting. Imagine all the new work it will open up to your business and for you to carry out at minimum cost. All parts run in oil - no down time and service is next to nothing.

The HYCON ring saw has a unique design and state of the art drive mechanism that will give you many hours of use and long lasting wearing parts that will ensure you low operating cost.

Investing in a ring saw is investing in more work because it will cut 300 mm deep compared to common petrol or hydraulic circular hand saws.

It is also investing in higher efficiency because it will cut 300 mm deep resulting in less work afterwards (e.g. a doorway) and less after work means job done faster and much cheaper!

#### **HYCON HRS400 PREMIUM Ring Saw**

Cut any concrete, bricks, stone, etc.

also with rebar in 300 mm depth

Cutting of openings for doors

and windows, cutting of pipes, etc.

Under water jobs

Very powerful - up to 18 HP

**ASCO Safety System** 

Long lifetime - all parts run in oil

Ergonomic design - operator comfort

Easy change of blades

Lower vibrations and weight





The HYCON Cut-off Saw PREMIUM is available in 4 versions: HCS14, HCS16, HCS18 and HCS20. All types can be used for horizontal and vertical cutting. They cut all types of concrete, steel, brick wall, asphalt etc.

The HYCON Cut-off saw is a very sturdy tool intended for cutting even under the most extreme conditions. It is completely unaffected by water and dust, and all parts run in oil. The HYCON PREMIUM-saws are built for hard use day after day - without breakdowns. The fact, that the saw is always working and does not require service means higher profits than with e.g. a petrol saw.

The cut-off saw offers top safety with the built-in ASCO System (Automatic Safety Cut off).
The tool automatically cuts off if the disc jams - no injury to the operator.

#### **HYCON Cut-off Saw PREMIUM-Series**

Low weight - from only 7.4 kg

30% more power - 0% maintenance..!

ldeal for pre-cutting

Superior built quality - perfectly balanced

Maintain full torque in lifetime

Stronger shaft and bearings

Slim design - get close to corners

raster blade rotation ste

Work under water

No airfilter - No belt

ASCO safety ( Automatic Safety Cut Off)





With a hydraulic handheld core drill you will achieve a significant improvement of your profits as there are no costs for setting up a rig. Furthermore, the performance of the core drill allows for drilling of holes up to ø350 mm in all materials - also with reinforcement. Therefore it is only necessary to invest in ONE core drill for many different kinds of jobs.

All parts run in oil - a guarantee for long life and low service costs. The tool is totally unaffected by water, dust etc. The core drill offers top safety with the built-in ASCO System (Automatic Safety Cut off). The tool automatically cuts off if the core bit jams - no injury to the operator.





Drains



**Electricians** 



Renovation



#### Advantages:

Freehand drilling - No rig required

Small and compact/low weight - Drills everywhere

Drills up to ø350 mm - ONE drill for all job

High performance - Drills also in reinforcemen

Cuts off if the core bit jams - ASCO safety system

No instructions needed - Can be used by everybody

All parts run in oil - Less service and longer life

No vibrations - no petrol engine - High operator comfort

Variable rotary speed - Easy drill start

Can drill under water - Numerous application


Closed system - No problems with dirt in the system

HYCON HCD

Max. drilling diameter

350 mm



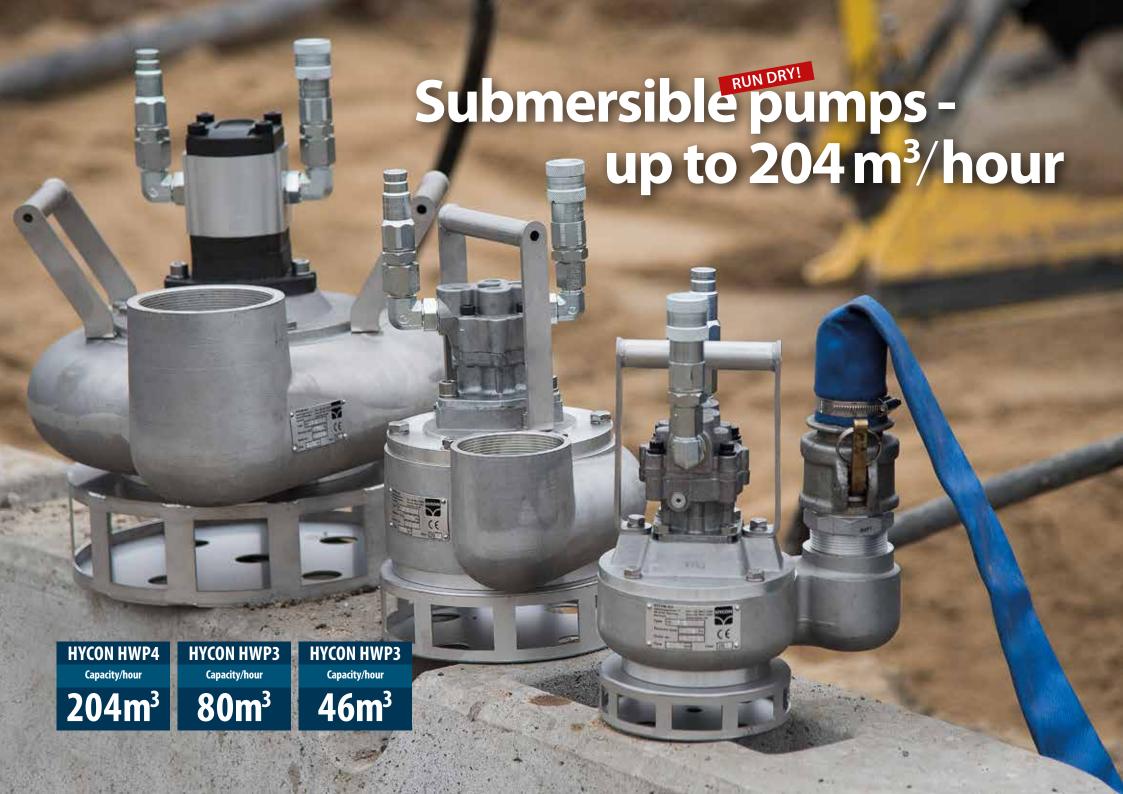



#### HYCON Submersible pumps: High quality and performance. Run dry without damage..!

The HYCON submersible pump is a VOR-TEX pump. VORTEX pumps are designed especially for dirty water with even very large solids.

The impeller at top sets the water in a circular movement and by centrifugal force a centre of air shaped like a cone will occur. This way there is very little contact between the water and the impeller, and wear is greatly reduced compared to other types of pumps.

In other types of pumps the water is pumped directly by the impeller, which is therefore worn much faster. Pumps of the special VORTEX design have longer lifetime and can pump larger solids.











#### **HYCON HED HRD20 Rock Drill**

The HYCON HRD20 rock drill is the only tool on the market with built in air flushing and 4 different settings of blow frequency and rotations. The investment in a HYCON HRD20 rock drill and a HYCON powerpack is therefore the best investment on the market.

The rock drill is characterized by a very high performance in relation to weight, and its high quality means long life. The drill rods are hex 22x108 mm, and therefore all standard drills can be used.

The rock drill can be connected to a HYCON powerpack or excavators or the like.

Maximum recommended drilling performance is  $\emptyset 45$  mm and approx. 3 m deep. Depending on the circumstances, the rock drill can reach a drilling speed of  $3\frac{1}{2}$  - 10 cm per minute.

### The HYCON Tools

The hydraulic system is completed by the series of HYCON professional tools. They are compact and lightweight tools - all with extremely high performance! The tool line is thoroughly tested as a result of a number of customer demands, focussing on key words like profitability and ultimate reliability.

|   | HYCON HRS400 PREMIUM Ring Saw             |           |  |
|---|---|-----------|--|
|   | THEORY THIS TOO T ILLINION KING SAW       |           |  |
|   | Weight w/o blade, kg                      | 10.2      |  |
|   | Diamond blade, mm                         | 400       |  |
|   | Cutting depth, mm                         | 300       |  |
|   | Oil flow, I.p.m                           | 30-40     |  |
| 8 | Working pressure, max bar                 | 160       |  |
|   | Vibration level (3 axis) m/s <sup>2</sup> | 2.5       |  |
|   | Noise level 1 m L <sub>PA</sub> dB        | 109       |  |
| į | Cutting speed, m/s                        | 37-49     |  |
| i | Rotation r.p.m.                           | 1750-2350 |  |
|   |   |           |  |

| HYCON HCS Cut-off Saw          | HCS14 Premium | HCS16 Premium | HCS18 Premium | HCS20 Premium |
|--------------------------------|---------------|---------------|---------------|---------------|
| Disc size                      | 14"/ø350 mm   | 16"/ø400 mm   | 18"/ø450 mm   | 20"/ø500 mm   |
| Oil flow, l.p.m.               | 20-30         | 20-40         | 20-40         | 30-40         |
| Working pressure, bar          | 120           | 120           | 120           | 120           |
| Max. pressure, bar             | 172           | 172           | 172           | 172           |
| Weight w/o hose/disc, kg       | 7.4           | 7.8           | 8.1           | 9.2           |
| Cutting depth, mm (1           | 137           | 162           | 187           | 212           |
| Noise level L <sub>PA</sub> dB | 105           | 97            | 99            | 99            |
| Noise level L <sub>wA</sub> dB | 116           | 108           | 110           | 110           |
| Vibration level, m/s           | < 2.5         | < 2.5         | < 2.5         | < 2.5         |
|                                |               |               |               |               |

| HYCON Core Drill               |                  |  |
|--------------------------------|------------------|--|
| Oil flow, l.p.m.               | 20               |  |
| Working pressure, bar          | 100              |  |
| Max. pressure, bar             | 170              |  |
| Weight, kg                     | 7.6              |  |
| r.p.m./drilling diameter       |                  |  |
| HCD25-100                      | 1500/ø25-ø100 mm |  |
| HCD50-200                      | 600/ø50-ø350 mm  |  |
| Core bits                      | Standard 1¼" UNC |  |
| Noise level L <sub>PA</sub> dB |                  |  |
| HCD25-100                      | 84               |  |
| HCD50-200                      | 80               |  |
| Vibration level, m/s²          | < 2.5            |  |
|                                |                  |  |

| HYCON HWP Submersible Pump  |                    |
|-----------------------------|--------------------|
| HWP2 oil flow, l.p.m.       | 20-30              |
| HWP3 oil flow, l.p.m.       | 20-30              |
| HWP4 oil flow, l.p.m.       | 20-40              |
| Max. pressure HWP2/3/4, bar | 172                |
| HWP2 weight, kg             | 7.7                |
| HWP3 weight, kg             | 11                 |
| HWP4 weight, kg             | 26.7               |
| HWP2 capacity/hour          | 46 m³              |
| HWP3 capacity/hour          | 80 m <sup>3</sup>  |
| HWP4 capacity/hour          | 204 m <sup>3</sup> |
|                             |                    |
|                             |                    |

| HYCON Post Driver                         |            |
|---|------------|
| Weight post driver, kg                    | 28.2       |
| Oil flow, l.p.m                           | 20-30      |
| Working pressure, bar                     | 100        |
| Max. pressure relief valve, bar           | 160        |
| Vibration level (3 axis) m/s <sup>2</sup> | 9.4        |
| Noise level 1 m L <sub>PA</sub> dB        | 96         |
| Adaptors:                                 |            |
| Square, mm                                | 65 x 65    |
| Round, mm                                 | Ø60 + Ø80  |
| Other sizes/profiles                      | On request |
| Remote valve                              | Yes        |
|   |            |

| HYCON HFD Oil Flow Divider                   |              |
|--|--------------|
| Pressure relief valve                        |              |
| (power source), bar                          | Max. 240     |
| Oil flow in (power source), l.p.m.           | Max. 80      |
| Pressure relief valve, bar                   | 160          |
| Oil flow out, l.p.m.                         | 20, 30 or 40 |
| The oil flow is regulated by interchangeable |              |
| nozzles. Standard is 20 l.p.m.               |              |

| HYCON HRD20 Rock Drill                         |  |  |
|--|--|--|
| Weight, kg                                     | 20   |  |
| Oil flow, l.p.m                                | 25-30  |  |
| Working pressure, bar                          | 115  |  |
| Max. pressure, bar                             | 150  |  |
| Tool chuck size, mm he                         | ex 22x108  |  |
|  |  |  |
| Rotation                                       | Counterclockwise   |  |
| Rotation  Air supply                           | Counterclockwise<br>max. 0.08 m <sup>3</sup> /min. / 2 bar |  |
|  | Counter cooking  |  |
| Air supply                                     | max. 0.08 m³/min. / 2 bar                                  |  |
| Air supply  Noise level 1 m L <sub>PA</sub> dB | max. 0.08 m³/min. / 2 bar                                  |  |



#### Hydraulic Powerpack HPP18V FLEX - Petrol

|                                    | A Commission of the Commission |
|------------------------------------|--|
| Oil flow, l.p.m.                   | 1x20-30-40   |
| Max. pressure, bar                 | 160  |
| Engine                             | Vanguard 18 HP petrol  |
| POR/adjustable                     | Adjustable   |
| Starter                            | Recoil and electric  |
| Weight, kg                         | 105  |
| Noise level 1 m L <sub>PA</sub> dB | 89   |
| Noise level L <sub>wA</sub> dB     | 101  |
|                                    |  |

#### Hydraulic Powerpack HPP26D - Diesel

| Oil flow, l.p.m.         | 1x20-40 l.p.m.          |
|--------------------------|-------------------------|
| Max. pressure, bar       | 160                     |
| Engine                   | Lombardini 26 HP diesel |
| POR/adjustable           | Adjustable              |
| Starter                  | Electric                |
| Weight, kg               | 220                     |
| Noise level              | n/a                     |
| Only for sale outside EU |                         |
|                          |                         |

### Hydraulic Powerpack HPP06 - Petrol Oil flow, l.p.m. 1x20

Max. pressure, bar

Noise level L<sub>wa</sub> dB

| The second secon |                     |
|--|---------------------|
| Engine   | Honda 6.5 HP petrol |
| POR/adjustable   | Adjustable          |
| Starter  | Recoil              |
| Weight, kg   | 54                  |
| Noise level 1 m L <sub>PA</sub> dB   | 88                  |

110

100

#### Hydraulic Powerpack HPP18VMF - Petrol

| A COLUMN TO MANAGEMENT OF THE PARTY OF THE P | THE RESERVE OF THE PARTY OF THE |
|--|--|
| Oil flow, l.p.m.   | 1x10-15-20-30-40   |
|  | 2x10-15-20   |
| Max. pressure, bar   | 160  |
| Engine   | Vanguard 18 HP petrol  |
| POR/adjustable   | Adjustable   |
| Starter  | Recoil and electric  |
| Weight, kg   | 112  |
| Noise level 1 m L <sub>PA</sub> dB   | 89   |
| Noise level L <sub>wa</sub> dB   | 101  |

#### Hydraulic Powerpack HPP09E - Electric

| Oil flow, l.p.m.                   | 1x20                    |
|------------------------------------|-------------------------|
| Max. pressure, bar                 | 150                     |
| Motor                              | 5.5 kW 16A/3x400V 50 Hz |
| POR/adjustable                     | -                       |
| Starter                            | Electric                |
| Weight, kg                         | 80                      |
| Noise level 1 m L <sub>PA</sub> dB | 85                      |
| Noise level L <sub>wA</sub> dB     | 97                      |
| WA .                               |                         |

#### Hydraulic Powerpack HPP09 - Petrol

| Oil flow, l.p.m.                   | 1x20              |
|------------------------------------|-------------------|
| Max. pressure, bar                 | 150               |
| Engine                             | Honda 9 HP petrol |
| POR/adjustable                     | POR               |
| Starter                            | Recoil            |
| Weight, kg                         | 68                |
| Noise level 1 m L <sub>PA</sub> dB | 88                |
| Noise level L <sub>wa</sub> dB     | 100               |

#### Hydraulic Powerpack HPP27VMF - Petrol

| Oil flow, l.p.m.         | 1x15-20-30-40-60      |
|--------------------------|-----------------------|
|                          | 2x15-20-30            |
| Max. pressure, bar       | 160                   |
| Engine                   | Vanguard 27 HP petrol |
| POR/adjustable           | Adjustable            |
| Starter                  | Electric              |
| Weight, kg               | 170                   |
| Noise level              | n/a                   |
| Only for sale outside EU |                       |

#### Hydraulic Powerpack HPP18E - Electric

| Š  | Oil flow, l.p.m.                    | 1x30 or 1x40     |
|----|-------------------------------------|------------------|
| -  | Max. pressure, bar                  | 160              |
| B  | Motor 11 kW 25A (30 lpm), 35A (40 l | pm)/3x400V 50 Hz |
| .0 | POR/adjustable                      | -                |
|    | Starter                             | Electric         |
| á  | Weight, kg                          | 128              |
| ľ  | Noise level 1 m L <sub>PA</sub> dB  | 86               |
| ä  | Noise level L <sub>wA</sub> dB      | 98               |
| М  |                                     | AA. II           |

#### Hydraulic Powerpack HPP13 FLEX - Petrol

| ij     | Oil flow, l.p.m.                   | 1x20-30  |
|--------|------------------------------------|--|
|        | Max. pressure, bar                 | 150  |
|        | Engine                             | Honda 13 HP petrol   |
| ť      | POR/adjustable                     | Adjustable   |
| Page 1 | Starter                            | Recoil   |
| 2      | Weight, kg                         | 81   |
| 7      | Noise level 1 m L <sub>PA</sub> dB | 89   |
| S      | Noise level L <sub>wA</sub> dB     | 101  |
|        |                                    | CONTRACTOR OF THE CONTRACTOR O |

#### Hydraulic Powerpack HPP13D FLEX - Diesel

|   | , aa                                 |                         |
|---|--------------------------------------|-------------------------|
|   | Oil flow, l.p.m.                     | 1x20-30                 |
| á | Max. pressure, bar                   | 150                     |
|   | Engine                               | Lombardini 11 HP diesel |
|   | POR/adjustable                       | Adjustable              |
| 2 | Starter                              | Recoil and electric     |
|   | Weight, kg                           | 114                     |
|   | Noise level 1 m L <sub>PA</sub> dB   | (20 l.p.m.) 93          |
|   | Noise level L <sub>wa</sub> dB (20 l | .p.m.) 105              |
|   | Only for sale outside EU             |                         |

#### Hydraulic Powerpack HPP18E FLEX - Electric

| R00000000000                       | 100000000000000000000000000000000000000 |
|------------------------------------|---|
| Oil flow, l.p.m.                   | 1x20-30-40                              |
| Max. pressure, bar                 | 160                                     |
| Motor                              | 11 kW 35A/3x400V 50 Hz                  |
| POR/adjustable                     | Adjustable                              |
| Starter                            | Electric                                |
| Weight, kg                         | 128                                     |
| Noise level 1 m L <sub>PA</sub> dB | 86                                      |
| Noise level L <sub>wa</sub> dB     | 98                                      |
|                                    |   |





| Hydraulic Breaker HH20                    |        |
|---|--------|
| Weight, kg                                | 22     |
| Oil flow, l.p.m.                          | 20     |
| Working pressure, bar                     | 110    |
| Max. pressure, bar                        | 160    |
| Blow frequency, 1/min.                    | 1560   |
| Noise level 1 m L <sub>PA</sub> dB        | 94     |
| Noise level L <sub>wA</sub> dB            | 106    |
| Vibration level (3 axis) m/s <sup>2</sup> | 6.8    |
| Tool size, mm hex                         | 25x108 |

| Hydraulic Breaker HH25   | 20/30 l.p.m.          |
|--|-----------------------|
| Weight, kg   | 25.3/25.8             |
| Oil flow, l.p.m.   | 20/30                 |
| Working pressure, bar  | 120/120               |
| Max. pressure, bar   | 160/160               |
| Blow frequency, 1/min.   | 1380/1380             |
| Noise level 1 m L <sub>PA</sub> dB   | 96/96                 |
| Noise level L <sub>wA</sub> dB   | 108/108               |
| Vibration level (3 axis) m/s <sup>2</sup>  | 9.4/9.4               |
| Tool size, mm hex  | 28/32                 |
| SECTION AND ADDRESS OF THE PARTY OF THE PART | CONTRACTOR CONTRACTOR |

| Trydiaulic Dieakei Hillony                |       |
|---|-------|
| Weight, kg                                | 9.9   |
| Oil flow, l.p.m                           | 20    |
| Working pressure, bar                     | 100   |
| Max. pressure, bar                        | 160   |
| Blow frequency, 1/min.                    | 2100  |
| Noise level 1 m L <sub>PA</sub> dB        | 93    |
| Noise level L <sub>wA</sub> dB            | 105   |
| Vibration level (3 axis) m/s <sup>2</sup> | 9.6   |
| Tool size, mm hex                         | 19x50 |
|   |       |

| Hydraulic Breaker HH20RV                  |        |
|---|--------|
| Weight, kg                                | 23.9   |
| Oil flow, l.p.m.                          | 20     |
| Working pressure, bar                     | 110    |
| Max. pressure, bar                        | 160    |
| Blow frequency, 1/min.                    | 1560   |
| Noise level 1 m L <sub>PA</sub> dB        | 94     |
| Noise level L <sub>wA</sub> dB            | 106    |
| Vibration level (3 axis) m/s <sup>2</sup> | 4.8    |
| Tool size, mm hex                         | 32x160 |

| Hydraulic Breaker HH27                    | 30 l.p.m.   |
|---|---|
| Weight, kg                                | 27.4  |
| Oil flow, I.p.m.                          | 30  |
| Working pressure, bar                     | 130   |
| Max. pressure, bar                        | 160   |
| Blow frequency, 1/min.                    | 1260  |
| Noise level 1 m L <sub>PA</sub> dB        | 98  |
| Noise level L <sub>wA</sub> dB            | 110   |
| Vibration level (3 axis) m/s <sup>2</sup> | 10.7  |
| Tool size, mm hex                         | 28/32   |
|   | Weight, kg Oil flow, I.p.m. Working pressure, bar Max. pressure, bar Blow frequency, 1/min. Noise level 1 m L <sub>pA</sub> dB Noise level L <sub>WA</sub> dB Vibration level (3 axis) m/s² |

| Hydraulic Breaker HH15                    |  |
|---|--|
| Weight, kg                                | 16.8   |
| Oil flow, l.p.m                           | 20   |
| Working pressure, bar                     | 100  |
| Max. pressure, bar                        | 160  |
| Blow frequency, 1/min.                    | 1830   |
| Noise level 1 m L <sub>PA</sub> dB        | 93   |
| Noise level L <sub>wA</sub> dB            | 105  |
| Vibration level (3 axis) m/s <sup>2</sup> | 6.6  |
| Tool size, mm hex                         | 22x82  |
|   | The state of the s |

| Hydraulic Breaker HH23                    | 20/30 l.p.m.  |
|---|---------------|
| Weight, kg                                | 23.4/23.5     |
| Oil flow, l.p.m.                          | 20/30         |
| Working pressure, bar                     | 120/120       |
| Max. pressure, bar                        | 160/160       |
| Blow frequency, 1/min.                    | 1380/1380     |
| Noise level 1 m L <sub>PA</sub> dB        | 96/96         |
| Noise level L <sub>wA</sub> dB            | 108/108       |
| Vibration level (3 axis) m/s <sup>2</sup> | 8.0/8.0       |
| Tool size, mm hex                         | 25x108/25x108 |

| Hydraulic Breaker HH35                    | 30/40 l.p.m. |
|---|--------------|
| Weight, kg                                | 29.4         |
| Oil flow, l.p.m.                          | 30-40        |
| Working pressure, bar                     | 130          |
| Max. pressure, bar                        | 160          |
| Blow frequency, 1/min.                    | 1100-1440    |
| Noise level 1 m L <sub>PA</sub> dB        | 99           |
| Noise level L <sub>wA</sub> dB            | 111          |
| Vibration level (3 axis) m/s <sup>2</sup> | 10.7         |
| Tool size, mm hex                         | 28/32        |



HYCON has a clear defined strategy on our quality.

We want to be the leading manufacturer of the highest quality products in the market. It is our objective to reach zero failures and we are very close to reaching that objective. Customers today are very demanding in terms of high quality and it is our aim to fulfil their expectations.

We have set up a system where we have described procedures of all our actions throughout the entire production chain from selecting raw materials to the final control of each individual product. We manufacture through suppliers, but they are all supplying according to our specifications. It means we are in complete control of the manufactured quality.

All products undergo thorough end control testing according to firm control procedures and all test results are stored in a database. It is a watertight quality control system and it is working!





**HYDRAULIC POWERPACS HHP** 

**LIGHT & HEAVY DUTY BREAKERS HH** 

**RING SAW HRS 400 PREMIUM** 

**CUT-OFF SAWS HCS PREMIUM** 

**CORE DRILLS HCD** 

**SUBMERSIBLE PUMPS HWP** 

HYCON offers you handheld hydraulic demolition tools with high focus on operator comfort and safety, which along with fuel savings up to 85% bring contractors high profit.

Common features of our products are unique quality, superior strength and extreme durability with zero maintenance.

Our customers are contractors, utilities, municipalities, railways, demolition, rental, army and rescueteams, cutting and drilling, renovation, groundwater lowering, pumping and many more - all over the world.

DISTRIBUTOR



HYCON A/S Juelstrupparken 11 DK-9530 Støvring Tel +45 9647 5200 Fax +45 9647 5201 www.hycon.dk

